


LED CEILING LAMP

www.ledceilinglamp.cn



15years 
Specialize in LED Ceiling Lamp **EUPPLE**
LIGHTING

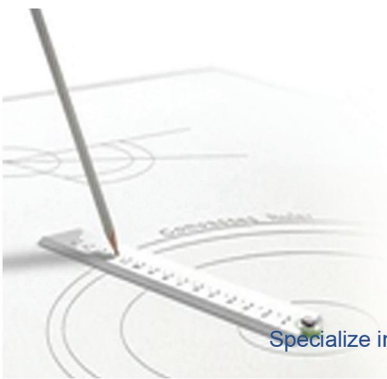

Eupple Lighting is a exported factory specializing in LED ceiling lamp and related ceiling lamp accessories

Product and Service Advantage:


1. Professional TUV certified ceiling light factory .
2. Three years warranty (For guarantee the quality .we promise refund the money or replace new lamp within warranty if unworkable.)
3. The product has been certified: SAA, CE (EMC+LVD), CB by TUV.
4. Comply with the latest Erp standard of EU.



In 2016,Eupple establish a new LED ceiling lamp production and sales in the area 2500 m² factory in Zhongshan. For more professional we only manufacture LED ceiling lamp and ceiling lamp module including R&D,design . We also found a LED ceiling lamp cover factory for more competitive.



LED Pack Wokshop



SMT Workshop



Aging test workshop



Packing Workshop

Slim LED Ceiling Lamp Series 1 (TÜV Certificated)

 No Dark

 170°


 Slim 5 cm

Erp (EU2019/2020)




Item No:12W1261(1)
Power:12W
LED type:SMD2835
Beam angle:170°
LED Lumen:1200lm, Ra≥80
Input voltage:AC110-240V
Material: PMMA+Cold-rolled steel


4 color of ring for chosing



Item No:16W1671(1)
Power:16W
LED type:SMD2835
Beam angle:170°
LED Lumen:1600lm, Ra≥80
Input voltage:AC110-240V
Material: PMMA+Cold-rolled steel



Item No:24W2492(1)
Power: 24W
LED type:SMD2835
Beam angle:170°
LED Lumen:2400lm, Ra≥80
Input voltage:AC110-240V
Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 2 (TÜV Certificated)



No Dark



170°



Slim 5 cm

Erp (EU2019/2020)



Item No:12W1261(2)

Power:12W


LED type:SMD2835

Beam angle:170°

LED Lumen:1200lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:16W1671(2)

Power:16W


LED type:SMD2835

Beam angle:170°

LED Lumen:1600lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:24W2492(2)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel




Slim LED Ceiling Lamp

Series 3 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm

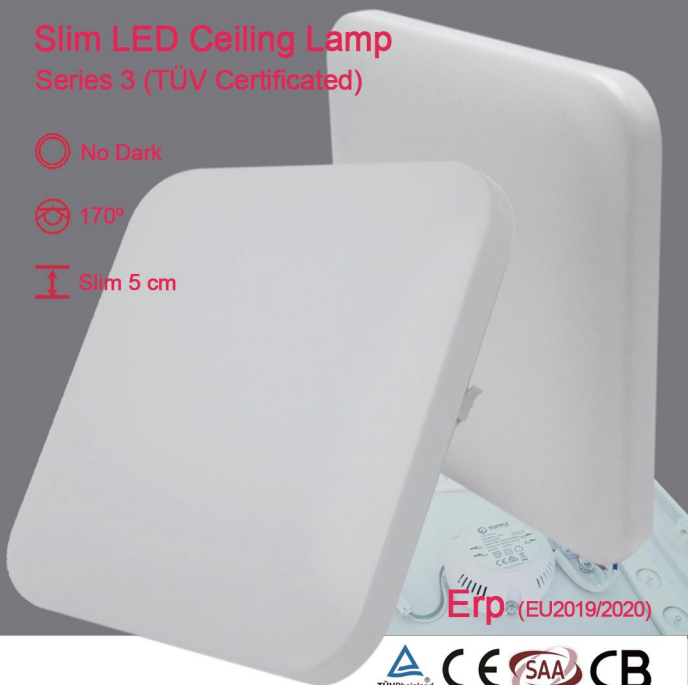

Erp (EU2019/2020)



TUV Isolated driver
Double insulation

170°
Beam angle



3PCS
14×31mil Chip

Big chip: 3pcs 14×31mil chip per LED
For the best brightness and long life LED
We regard 1.5W LED as 1W using
Light source lumens >100lm/W

Item No:16W1671(3)

Power:16W

LED type:SMD2835

Beam angle:170°

LED Lumen:1600lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:24W2492(3)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 4 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm



Silver Ring



White Ring

Item No:16W1671(4)

Power:16W


LED type:SMD2835

Beam angle:170°

LED Lumen:1600lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:24W2492(4)

Power:24W

LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series-5 (TÜV Certificated)

Thick metal housing
Anti-mosquito

Erp (EU2019/2020)



Black metal ring



White metal ring



Silver metal ring

Item No:16W1671(5)

Power:16W


LED type:SMD2835

Beam angle:170°

LED Lumen:1600lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



16W

Item No:24W2492(5)

Power: 24W

LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V


Material: PMMA+Cold-rolled steel



24W

Waterproof LED Ceiling Lamp

Series 6 (TÜV Certificated)

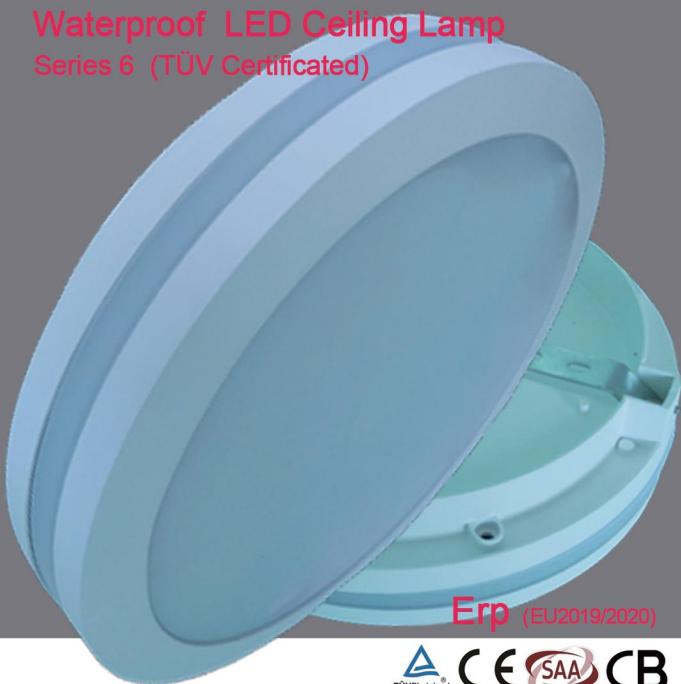

Erp (EU2019/2020)




IP65




V0
Fire Resistance
Rating

Item No:18W3621(5)
Power:18W
LED type:SMD2835
Beam angle:150°
LED Lumen:1800lm, Ra≥80
Input voltage:AC110-240V
Material: PC+ Die cast aluminum



Item No:24W4831(5)
Power: 24W
LED type:SMD2835
Beam angle:150°
LED Lumen:2400lm, Ra≥80
Input voltage:AC110-240V
Material: PC+ Die cast aluminum



Slim LED Ceiling Lamp


Series 8 -12 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm

Erp (EU2019/2020)

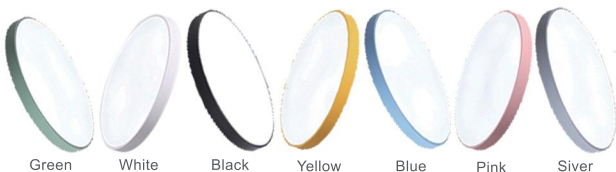

Green

White

Black

Yellow

Blue

Pink

Silver

Different shape and color of the ring can be customized for all item




Round

Item No.	Power	Lamp Size	LED Lumen
12W1261(8)	12W	Dia230×H50mm	1200lm
16W1671(8)	16W	Dia300×H50mm	1600lm
24W2492(8)	24W	Dia400×H50mm	2400lm



Square

Item No.	Power	Lamp Size	LED Lumen
16W1671(9)	16W	Dia300×H50mm	1600lm
24W2492(9)	24W	Dia400×H50mm	2400lm




Hexagon

Item No.	Power	Lamp Size	LED Lumen
16W1671(10)	16W	Dia300×H50mm	1600lm
24W2492(10)	24W	Dia400×H50mm	2400lm



Octagonal A

Item No.	Power	Lamp Size	LED Lumen
16W1671(11)	16W	Dia300×H50mm	1600lm
24W2492(11)	24W	Dia400×H50mm	2400lm



Octagonal B

Item No.	Power	Lamp Size	LED Lumen
16W1671(12)	16W	Dia300×H50mm	1600lm
24W2492(12)	24W	Dia400×H50mm	2400lm

Beam angle:170°

Input voltage: AC100-240V 50/60Hz,
Material: PMMA+ Cold-rolled steel

Wooden LED Ceiling Lamp

Series 13 - 16 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm

Erp (EU2019/2020)



Different color of the ring are customized for all series



Yellow

White

Black

Green

Blue

Pink

Different shape are customized



Round:Half-wooden ring

Item No.	Power	Lamp Size	LED Lumen
16W1671(13)	16W	Dia300×H50mm	1600lm
24W2492(13)	24W	Dia400×H50mm	2400lm



Square:Half-wooden ring

Item No.	Power	Lamp Size	LED Lumen
16W1671(14)	16W	Dia300×H50mm	1600lm
24W2492(14)	24W	Dia400×H50mm	2400lm



Round:Whole-wooden ring

Item No.	Power	Lamp Size	LED Lumen
16W1671(15)	16W	Dia300×H50mm	1600lm
24W2492(15)	24W	Dia400×H50mm	2400lm



Square:Whole-wooden ring

Item No.	Power	Lamp Size	LED Lumen
16W1671(16)	16W	Dia300×H50mm	1600lm
24W2492(16)	24W	Dia400×H50mm	2400lm

Beam angle:170°

Input voltage: AC100-240V 50/60Hz,
Material: Wood+PMMA+ Cold-rolled steel

Wooden LED Ceiling Lamp

Series 17 - 21 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm

Erp (EU2019/2020)



Different shape and color of the ring can be customized for all item



Item No.	Power	Lamp Size	LED Lumen
16W1671(17)	16W	Dia300×H50mm	1600lm
24W2492(17)	24W	Dia400×H50mm	2400lm




Item No.	Power	Lamp Size	LED Lumen
16W1671(18)	16W	Dia300×H50mm	1600lm
24W2492(18)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(19)	16W	Dia300×H50mm	1600lm
24W2492(19)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(20)	16W	Dia300×H50mm	1600lm
24W2492(20)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(21)	16W	Dia300×H50mm	1600lm
24W2492(21)	24W	Dia400×H50mm	2400lm

Input voltage: AC100-240V 50/60Hz,
Material: PMMA+ Cold-rolled steel

Metal Craft LED Ceiling Lamp

Series 22 - 26 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm

Erp (EU2019/2020)



Different shape and color of the ring can be customized for all item



Item No.	Power	Lamp Size	LED Lumen
16W1671(22)	16W	Dia300×H50mm	1600lm
24W2492(22)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(23)	16W	Dia300×H50mm	1600lm
24W2492(23)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(24)	16W	Dia300×H50mm	1600lm
24W2492(24)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(25)	16W	Dia300×H50mm	1600lm
24W2492(25)	24W	Dia400×H50mm	2400lm



Item No.	Power	Lamp Size	LED Lumen
16W1671(26)	16W	Dia300×H50mm	1600lm
24W2492(26)	24W	Dia400×H50mm	2400lm

Input voltage: AC100-240V 50/60Hz,
Material: PMMA+ Cold-rolled steel

LED Ceiling Lamp Module

Series 27 (TÜV Certified)



Erp (EU2019/2020)



Item No:XD-TJ12W
Power:12W
LED type:SMD2835
Beam angle:150°
Lumen:1200lm, Ra≥80
Input voltage:AC110-240V



Item No:XD-TJ18W
Power:18W
LED type:SMD2835
Beam angle:150°
Lumen:1800lm, Ra≥80
Input voltage:AC110-240V



Item No:XD-TJ24W
Power:24W
LED type:SMD2835
Beam angle:150°
Lumen:2400lm, Ra≥80
Input voltage:AC110-240V



DIY LED Ceiling Lamp

Series 28 (TÜV Certificated)



The whole lamp and driver with TUV certificated , Isolated driver
Big chip: 17×34 mil chip per 0.5W LED, Light source lumens >100lm/W



Item No.	Power	Lamp Size
12W2411(1)	12W	255×85MM
18W3621(1)	18W	330×90MM
24W4831(1)	24W	380×100MM



Item No.	Power	Lamp Size
12W2411(2)	12W	255×85MM
18W3621(2)	18W	330×90MM
24W4831(2)	24W	380×100MM



Item No.	Power	Lamp Size
12W2411(3)	12W	255×85MM
18W3621(3)	18W	330×90MM
24W4831(3)	24W	380×100MM



Item No.	Power	Lamp Size
12W2411(4)	12W	255×85MM
18W3621(4)	18W	330×90MM
24W4831(4)	24W	380×100MM

Waterproof LED Ceiling Lamp

Series 29 (TÜV Certificated)

IP54



Item No:12W2411(6)

Power:12W


LED type:SMD2835

Beam angle:150°

LED Lumen:1200lm, Ra≥80

Input voltage:AC110-240V

Material: PC+ABS



Item No:18W3621(6)

Power:18W


LED type:SMD2835

Beam angle:150°

LED Lumen:1800lm, Ra≥80

Input voltage:AC110-240V

Material: PC+ ABS



Item No:24W4831(6)

Power: 24W


LED type:SMD2835

Beam angle:150°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PC+ABS



2cm thickness LED Ceiling Lamp

Series 30 (Anti-mosquito)



IP43
Anti-mosquito



Only need a simple action to install - Rotate clockwise

Item No.	Power	Feature	Brightness	Lamp Size
XM230-24W-C	24W	Single Color, On-Off, IP43,	>2000lm	Dia230mm×H20mm
XM300-28W-C	28W		>2300lm	Dia300mm×H20mm
XM400-38W-C	38W		>3300lm	Dia400mm×H20mm
XM500-48W-C	48W		>4400lm	Dia500mm×H20mm
XM230-24W-S	24W	Tri-color, IP43	>2000lm	Dia230mm×H20mm
XM300-28W-S	28W		>2300lm	Dia300mm×H20mm
XM400-38W-S	38W		>3300lm	Dia400mm×H20mm
XM500-48W-S	48W		>4400lm	Dia500mm×H20mm
XM230-24W-Y	24W	3000-6500K with remote controller	>2000lm	Dia230mm×H20mm
XM300-28W-Y	28W		>2300lm	Dia300mm×H20mm
XM400-38W-Y	38W		>3300lm	Dia400mm×H20mm
XM500-48W-Y	48W		>4400lm	Dia500mm×H20mm

Different body housing can be chosen
Voltage:AC85-265V , Raw materials:ABS

Waterproof LED Ceiling Lamp

Series 31 (TÜV Certificated)

IP54



Feature 1: Easy to install



Buckle-type installation: just need a slight push to surface-mounted on ceiling

Feature 2: Microwave sensor (available)



MOTION SENSOR

Can adjust:

Sensitivity

Hold-time

Daylight Sensor

Feature 3: Anti-theft, Anti-vandalism, Fireproof, Waterproof



Anti-theft switch



Anti-collision




Fire Resistance:V0



IP54:Waterproof

Feature 4: Reduce inventory pressure



In one Lamp:

LED Color: can be seted 3000K / 4000K / 6000K

Power :can be seted 2 levels (Min/ Max Power)
(18W/25W for Dia:300mm Lamp)

For the Microwave sensor Lamp :

Sensivity ,Hold-time, Daylight sensor
can be adjusted by DIP switch

Feature 5: With Safety rope



Fall prevention, easy installation and wiring

Feature 6: Dimmable

Triac dimmable



Dimmable

Waterproof LED Ceiling Lamp

Series 31 (TÜV Certificated)

IP54



Ultra Slim:42mm



Microwave Sensor, Dimmable, Pre-set CCT, Pre-set Power are available



IP54



V0

Fire Resistance Rating



Silver ring



White ring

Item No.	Power	Feature	Brightness	Lamp Size
FS200-15W-C	12W/15W	Round,Dimmable	>1500lm	Dia200mm×H42mm
FS250-18W-C	15W/18W	Round,Dimmable	>1800lm	Dia250mm×H42mm
FS300-25W-C	18W/25W	Round,Dimmable	>2500lm	Dia300mm×H42mm
FS400-35W-C	25W/35W	Round,Dimmable	>3500lm	Dia300mm×H42mm
FS300-F25W-C	18W/25W	Square,Dimmable	>2500lm	300*300mm×H42mm
FS400-F35W-C	25W/35W	Square,Dimmable	>3500lm	400*400mm×H42mm
FS200-15W-S	12W/15W	Round,Sensor	>1500lm	Dia200mm×H42mm
FS250-15W-S	15W/18W	Round,Sensor	>1500lm	Dia250mm×H42mm
FS300-25W-S	18W/25W	Round,Sensor	>2500lm	Dia300mm×H42mm
FS400-35W-S	25W/35W	Round,Sensor	>3500lm	Dia300mm×H42mm
FS300-F25W-S	18W/25W	Square,Sensor	>2500lm	300*300mm×H42mm
FS400-F35W-S	25W/35W	Square,Sensor	>3500lm	400*400mm×H42mm

Material:PC(V0), IK10, Ultra slim:42mm, PF>0.9, Ra>80

Microwave Sensor LED Ceiling Lamp

Series 32 (TÜV Certificated)

 No Dark

 170°

 Slim 5 cm



The 5.8G motion sensor work with the daylight sensor, can be adjust by selecting the combination on the DIP switches



Detection area setting

	1	2	
I	●	●	100%
II	●	○	75%
III	○	●	50%
IV	○	○	10%

100%:6-8 meter
75% :5-6 meter
50% :3-4 meter
10% :within 1 meter

Holding time setting

	3	4	
I	●	●	5s
II	●	○	90s
III	○	●	5min
IV	○	○	15min

Setting holding time
for 5s, 90s, 5min, 5min,
after lamp lighting

Daylight sensor setting

	5	6	
I	●	●	Disable
II	●	○	50Lux
III	○	●	10Lux
IV	○	○	2Lux

Setting 2 Lux, 10Lux
50Lux, Disable, for
daylight sensor



Item No.	Power	Lamp Size
LD16W1671(1)	16W	330×50MM
LD24W2492(1)	24W	380×50MM



Item No.	Power	Lamp Size
LD16W1671(4)	16W	330×50MM
LD24W2492(4)	24W	380×50MM



Item No.	Power	Lamp Size
LD16W1671(3)	16W	330×50MM
LD24W2492(3)	24W	380×50MM



Item No.	Power	Lamp Size
LD16W1671(6)	16W	280×50MM
LD24W2492(6)	24W	330×50MM

Dimmable Microwave Sensor LED Ceiling Lamp Series 33 (TÜV Certified)

 No Dark

 170°

 Slim 5 cm



- Sensor Competitive Points
- 1.Sensitivity Adjustable
 - 2.Hold-time Adjustable
 - 3.Daylight Sensor Adjustable
 - 4.Stand-by Time Adjustable
 - 5.Stand-by Dim Level Adjustable



Item No.	Power	Lamp Size
YTLTD16W1671(1)	16W	330×50MM
YTLTD24W2492(1)	24W	380×50MM



Item No.	Power	Lamp Size
YTLTD16W1671(4)	16W	330×50MM
YTLTD24W2492(4)	24W	380×50MM



Item No.	Power	Lamp Size
YTLTD16W1671(3)	16W	330×50MM
YTLTD24W2492(3)	24W	380×50MM




Item No.	Power	Lamp Size
YTLTD16W1671(6)	16W	280×50MM
YTLTD24W2492(6)	24W	330×50MM

Microwave Sensor LED Module


Series 34 (CE:LVD+EMC)



The 5.8G motion sensor work with the daylight sensor, can be adjust by selecting the combination on the DIP switches



Light remains OFF.
With sufficient daylight,
Even motion detected,



Light is on.
When insufficient daylight
and motion detected,



After the last detection and
hold time elapsed, light OFF.

Item No:LD-TJ18W

Power:18W

LED type:SMD2835

Beam angle:150°

Lumen:1600lm, Ra≥80

Input voltage:AC110-120V/ 220-240V



Item No:LD-TJ24W

Power:24W

LED type:SMD2835

Beam angle:150°

Lumen:2160lm, Ra≥80

Input voltage:AC110-120V/220-240V



Emergency LED Ceiling Lamp

Series 35 (EMC+ LVD Certified)




- "N" is neutral wire - - - - -
- "|||" is grounding wire - - - - -
- "1" is charging live wire - - - - -
- "2" is switch live wire - - - - -



180
Minutes

in-Built Emergency
Battery Backup

1. EMC+LVD Driver
2. ON/OFF + Emergency
3. Emergency time: 180mins
4. Emergency power: 3W
5. On Power: 16W/22W (LED: 100LM/W)

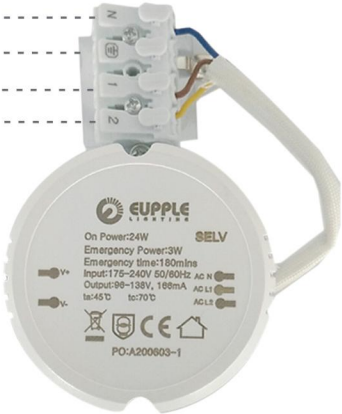

Item No.	Power	Lamp Size
YJ16W1671(X)	16W	Dia330×(50-100)mm
YJ24W2492(X)	24W	Dia380×(50-100)mm

Item No.	Power	Lamp Size
16W1671(3)	16W	Dia300×H50mm
24W2492(3)	24W	Dia400×H50mm

Slim LED Ceiling Lamp Series 36 (TÜV Certificated)

 No Dark

 170°

 Slim 6 cm



Erp (EU2019/2020)



TUV Isolated driver
Double insulation


170°
Beam angle



3PCS
14×31mil Chip


Big chip:3pcs 14×31 mil chip per LED
For the best brightness and long life LED
We regard 1.5W LED as 1W using
Light source lumens >110lm/W

Item No:40W-400(1)
Power:40W
LED type:SMD2835
Beam angle:170°
LED Lumen:4200lm, Ra≥80
Input voltage:AC200-240V
Material: PMMA+Cold-rolled steel



40W


Item No:40W-400(2)
Power: 40W
LED type:SMD2835
Beam angle:170°
LED Lumen:4200lm, Ra≥80
Input voltage:AC200-240V
Material: PMMA+Cold-rolled steel



40W

Slim LED Ceiling Lamp

Series 37 (TÜV Certificated)

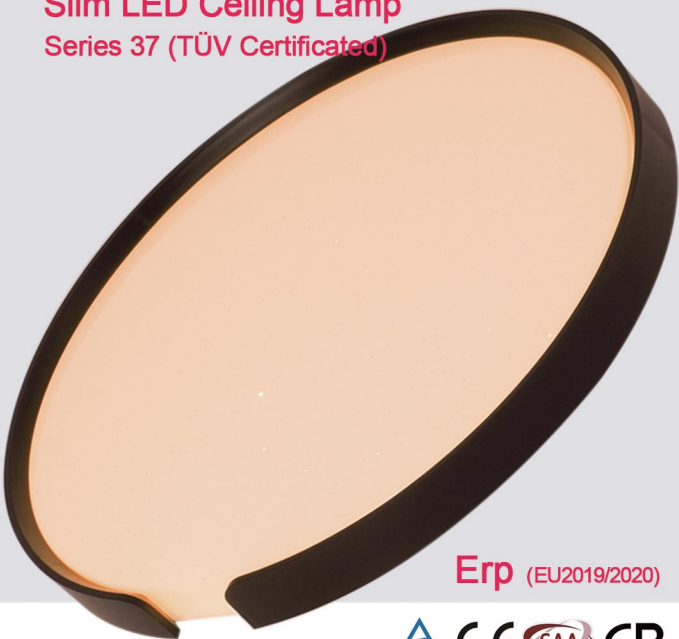

Erp (EU2019/2020)



White ring

White+Golden

Black ring

Black+Golden

Item No:24W2492(32)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:40W-500(32)

Power: 40W


LED type:SMD2835

Beam angle:170°

LED Lumen:3600lm, Ra≥80

Input voltage:AC220-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 38 (TÜV Certified)



Erp (EU2019/2020)



White+Grey

White ring

White+Black

Item No:24W2492(33)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:40W-500(33)

Power: 40W


LED type:SMD2835

Beam angle:170°

LED Lumen:3600lm, Ra≥80

Input voltage:AC220-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 39 (TÜV Certificated)



Erp (EU2019/2020)



White+Black

White+Golden

White+Grey

Item No:24W2492(34)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:40W-500(34)

Power: 40W


LED type:SMD2835

Beam angle:170°

LED Lumen:3600lm, Ra≥80

Input voltage:AC220-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 40 (TÜV Certified)



Erp (EU2019/2020)



White+Grey

White+Golden

White+Black

Item No:24W2492(35)

Power: 24W

LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:40W-500(35)

Power: 40W


LED type:SMD2835

Beam angle:170°

LED Lumen:3600lm, Ra≥80

Input voltage:AC220-240V

Material: PMMA+Cold-rolled steel



Slim LED Ceiling Lamp

Series 41 (TÜV Certified)



Erp (EU2019/2020)



White+Grey

White+Black

White+Golden

White+Brown

Item No:24W2492(36)

Power: 24W


LED type:SMD2835

Beam angle:170°

LED Lumen:2400lm, Ra≥80

Input voltage:AC110-240V

Material: PMMA+Cold-rolled steel



Item No:40W-500(36)

Power: 40W


LED type:SMD2835

Beam angle:170°

LED Lumen:3600lm, Ra≥80

Input voltage:AC220-240V

Material: PMMA+Cold-rolled steel




Preset 3 Color LED Ceiling Lamp Series 42 (TÜV Certified)



Erp (EU2019/2020)

Preset 3-Color



SW1	SW2	CCT
OFF	ON	3000K
ON	ON	4000K
ON	OFF	6000K

LED color temperature (CCT) can be changed by setting DIP switches 1 and 2 "ON" and "OFF"



Item No.	Power	Lamp Size
18W3621(5)	18W	Dia330×60mm
24W4831(5)	24W	Dia380×60mm



Item No.	Power	Lamp Size
18W3621(6)	18W	Dia330×50mm
24W4831(6)	24W	Dia380×50mm



Item No.	Power	Lamp Size
18W3621(7)	18W	Dia330×50mm
24W4831(7)	24W	Dia380×50mm



Item No.	Power	Lamp Size
18W3621(8)	18W	Dia330×85mm
24W4831(8)	24W	Dia380×85mm

Remoted Control LED Ceiling Lamp Series 43 (TÜV Certificated)



Erp (EU2019/2020)

Standby Power < 0.5W

Remote Control :2.4G / Infrared

CCT:3000-6000K

Brightness Dim

Timing: 30min / 2h / 4h

Night Light Mode



Black Ring

White Ring



Item No:YK24W-01

Power:24W

LED type:SMD2835

Isolated Driver (TUV Certified)

LED Lumen:2400lm, Ra≥80

Input voltage:AC200-240V

Material: PMMA+Cold-rolled steel



24W

Item No:YK40W-01

Power:40W


LED type:SMD2835

Isolated Driver (TUV Certified)

LED Lumen:4000lm, Ra≥80

Input voltage:AC200-240V

Material: PMMA+Cold-rolled steel



40W

Smart LED Ceiling Lamp

Series 51 (EMC+LVD Certificated)



Smart+



Amazon Alexa / Google Assistant / IFTTT

with 2.4G remote controller



Only need a simple action to install - A TWIST

Item No: TYBG-300-24W
 Power: 24W+ 10W RGB
 LED type: SMD2835+SMD5050
 Beam angle: 170°
 Lumen: 1860lm, Ra≥80
 Input voltage: AC220-240V
 Material: ABS+PS
 PF≥0.95



Item No: TYBG-380-30W
 Power: 30W+ 10W RGB
 LED type: SMD2835+SMD5050
 Beam angle: 170°
 Lumen: 2640lm, Ra≥80
 Input voltage: AC220-240V
 Material: ABS+PS
 PF≥0.95



Smart LED Ceiling Lamp

Series 52 (EMC+LVD Certificated)



Smart+

tuya[®]



Amazon Alexa / Google Assistant / IFTTT


with 2.4G
remote controller



Only need a simple action to install - A TWIST



Item No:TYBG-297-28W
Power:28W+ 10W RGB
LED type:SMD2835+SMD5050
Beam angle:170°
Lumen:2360lm, Ra≥80
Input voltage:AC110/AC230V
Material: ABS+PS
PF≥0.95



28W+ 10W(Back Light: RGB)

Smart LED Ceiling Lamp

Series 53 (TÜV Certificated)

tuya



works with
amazon alexa



Available on the iPhone
Google Assistant



TmallGenie



Smart+



Traditional switch



AI speakers
voice control



2.4G WiFi



APP control



Alexa/Google/IFTTT



Timer



Customize scenes



Mobile control:


- 1, One mobile can control many ceiling lamp
- 2, One ceiling lamp can be controlled by many mobile
- 3, Far distance control: You can control the lamp with mobile even if you are away from home



6000K

3000K

CCT Changing



Dark

Dimmable

Bright

Item No: ZN500-40W

Dia: 500mm, Height: 50mm

LED type: SMD 2835 leds

Lumen: 3200LM PF>0.9

Input : AC220-240V

Power: 40W

Powered by tuya (Smart+)

